


# Magus Stand, by Teresonic Installation Guide

Teresonic®, 1215 Fiddlers Green, San Jose, California 95125, USA  
www.teresonic.com, info@teresonic.com, 1-877-287-1649

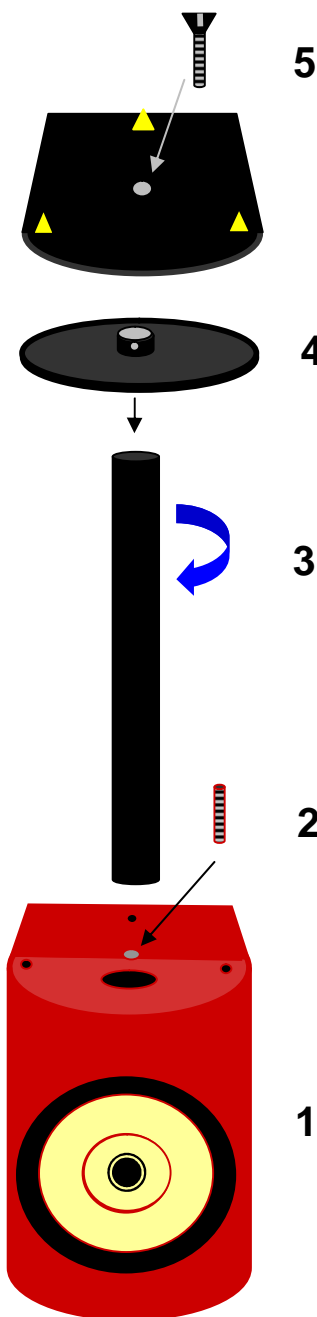

## Step 1: Turn the speaker upside down

Carefully take the Magus speaker and turn it upside down onto a soft surface (e.g. carpet) **Note: make sure not to touch the speaker driver during this process. Never lay speaker face down!**

## Step 2: Screw in the socket set screw

Install the socket set screw in the center hole at the bottom of the Magus speaker.

## Step 3: Install the main poll

Place the main poll over the set screw already attached to the speaker and turn it clock wise until the pole is firmly attached to the bottom of the speaker.

## Step 4: Mount the reflector board

Mount the reflector (dispersion) board by gently pushing it down the poll to about two inches from the bottom of the speaker. When in place tighten the small socket set screw found on the ring on the reflector board using the provided hex key (3mm). **Note: do not over tighten the screw since you may want to move the reflector board later to adjust to your room's acoustics.**

## Step 5: Install the bottom plate and spikes

Mount the bottom plate (with high-gloss side towards the speaker) using the provided screw and the hex key (5mm). Finish the installation by installing the spikes (three per speaker). **Note: use sharp tips if speakers are going to be positioned on a carpet to enhance stability of your speakers as well as sound characteristics. For use on hard surfaces install floor discs to prevent scratching the floor. Alternatively, you can unscrew the sharp spike tips and replace them with self-adhesive soft pads (provided).**